



SBL75-12i(sh) (12V82Ah)



Applications

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Emergency light
- Railway signal
- Alarm and security system
- Communication power supply
- DC power supply

Certificates

Conform to
IEC60896-21&22


Specifications

Nominal Voltage	12V	Operating Temp. Range	Discharge:	-15~50°C
Nominal Capacity	82.0Ah (C ₁₀ , 10.8V)		Charge:	-15~45°C
Approx. Weight	23kg		Storage:	5~30°C
Terminal	M6	Float Charge	2.285V/cell ± 0.5 % @ 20°C	
Container Material	ABS UL94 HB		Charging Current:	0.1-0.2C
Rated Capacity (20°C)	85.2Ah/4.26A, 20hr, 10.8V		Temperature coefficient:	-3mV/cell/°C
	82.0Ah/8.2A, 10hr, 10.8V	Capacity affected by Temp.	40°C	103%
	77.0Ah/9.63A, 8hr, 10.5V		25°C	100%
	73.5Ah/14.7A, 5hr, 10.5V		0°C	86%
	69.6Ah/23.2A, 3hr, 10.5V	Self Discharge	SSB batteries may be stored for up to 6 months at 20°C and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
	62.7Ah/62.7A, 1hr, 9.6V	Life Expectancy	10-12 years according to EUROBAT	
Max. Discharge Current	800A ((5 sec.))			
Internal Resistance / Impedance (1kHz)	Approx. 6mΩ			
Nominal Oper. Temp. R.	20±2°C			

Dimensions

■ M6 Terminal

Unit: mm | Dimensions: 260±2 Length X 168±2 Width X 211±2 Height (214±2 Height incl. Terminal)

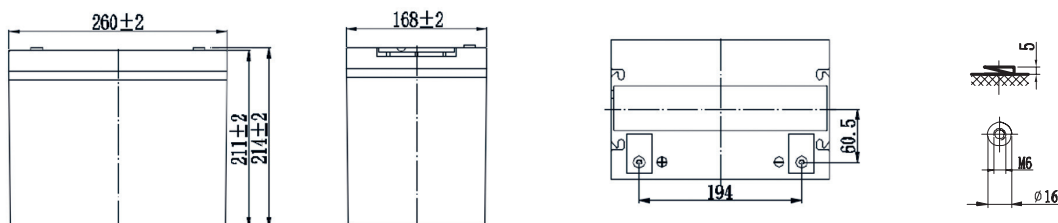


Constant Current Discharge (Amperes) at 20°C

End Point	10min	15min	30min	1h	1.5h	3h	5h	8h	10h	20h
1.60V/cell	175.72	145.36	97.52	62.7	44.9	24.5	15.6	9.93	8.39	4.37
1.65V/cell	174.8	143.52	96.6	62.1	44.4	24.1	15.3	9.88	8.36	4.34
1.70V/cell	172.04	142.6	95.68	61.3	43.9	23.3	15.1	9.75	8.31	4.30
1.75V/cell	168.36	138.92	93.84	60.0	42.9	23.2	14.7	9.63	8.25	4.28
1.80V/cell	158.24	130.64	87.86	56.4	40.4	22.3	14.5	9.5	8.20	4.26


Constant Power Discharge (Watts/cell) at 20°C

End Point	10min	15min	30min	45min	1h	1.5h	2h	3h	5h	8h
1.60V/cell	345.0	281.52	184.0	138.92	121.0	87.8	59.1	43.2	29.85	15.66
1.65V/cell	341.32	278.76	182.16	138.0	120.0	86.9	57.8	42.1	29.63	15.54
1.70V/cell	337.64	276.0	179.4	136.16	119.0	85.8	55.4	41.8	28.97	15.2
1.75V/cell	238.28	269.56	175.72	133.4	116.0	84.0	53.4	41.2	28.97	15.17
1.80V/cell	310.04	253.92	165.6	125.12	109.0	79.0	51.9	40.9	28.75	15.09


Discharge Characteristics

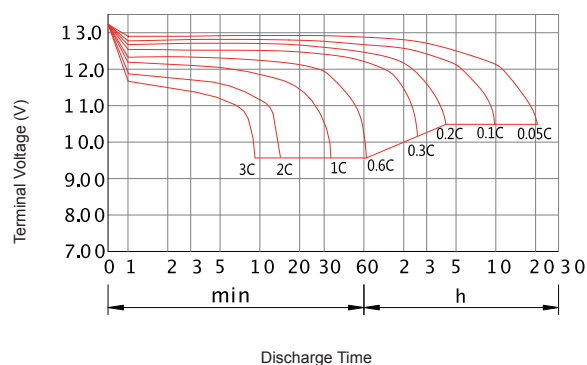

Float Charging Characteristics

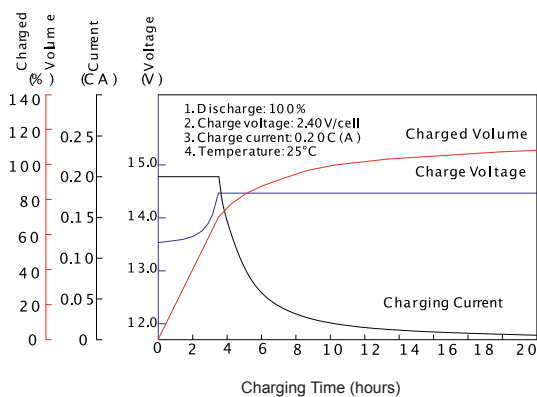

Temperature Effects in Relation to Battery Capacity

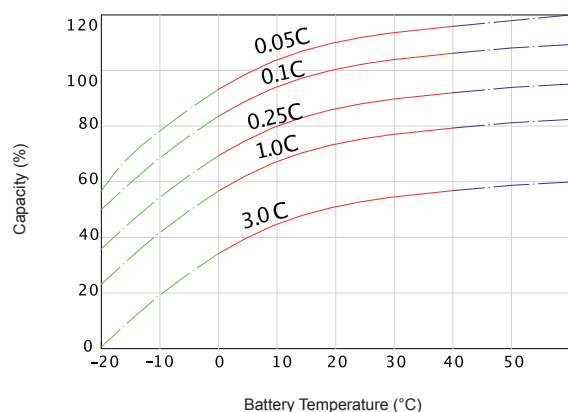

Effect of Temperature on Long Term Float Life

