

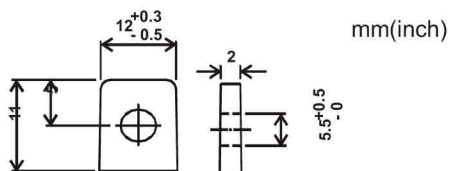


RECHARGEABLE SEALED LEAD ACID BATTERY

SPECIFICATION

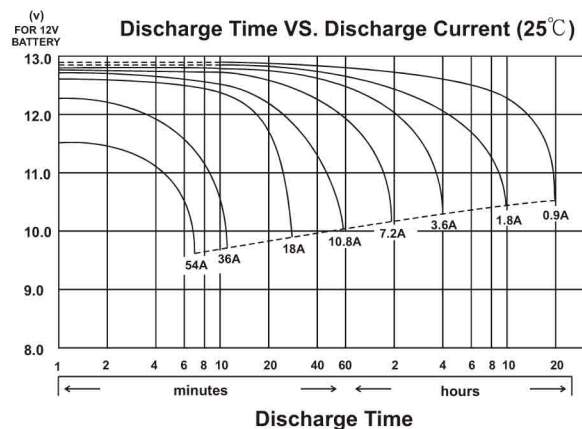

F3
(M5 Bolts)

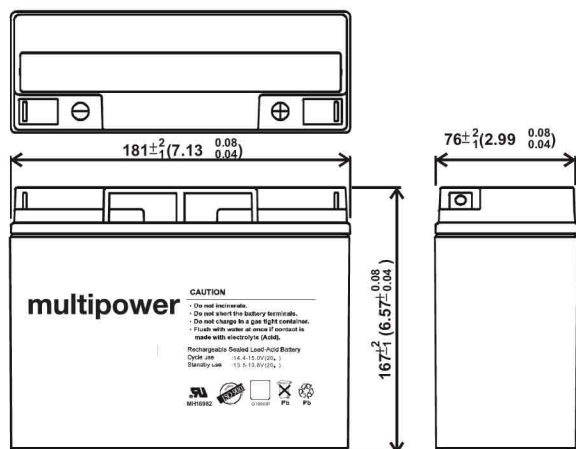

MP18-12

Nominal Voltage (V) 12V

Nominal Capacity

20hour rate (0.9A to 10.50V)	18Ah
10hour rate (1.8A to 10.50V)	18Ah
5hour rate (3.06A to 10.20V)	15.3Ah
1C (18A to 9.60V)	8.1Ah
3C (54A to 9.60V)	6.48Ah

Weight 6.283kg(13.82Lbs.)

Internal Resistance (at 1KHz) 10 mΩ

Maximum Discharge Current for 30 seconds : 360A

Maximum Discharge Current for 5 seconds : 720A

Operating Temperature Range

Charge	0°C (32°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 14.4 to 15.0V
Maximum Charging Current: 5.4A

Standby use:

Float Charging Voltage 13.50 to 13.80V

Life expectancy :

Cycle Use:

100% depth of discharge 200 cycles
80% depth of discharge 225 cycles
50% depth of discharge 500 cycles

Standby Use: 3-5 years

Case Material ABS
(Option: 94-HB & 94V-0 flame retardant case)

Terminal F3