


LR03AD POWERLINE

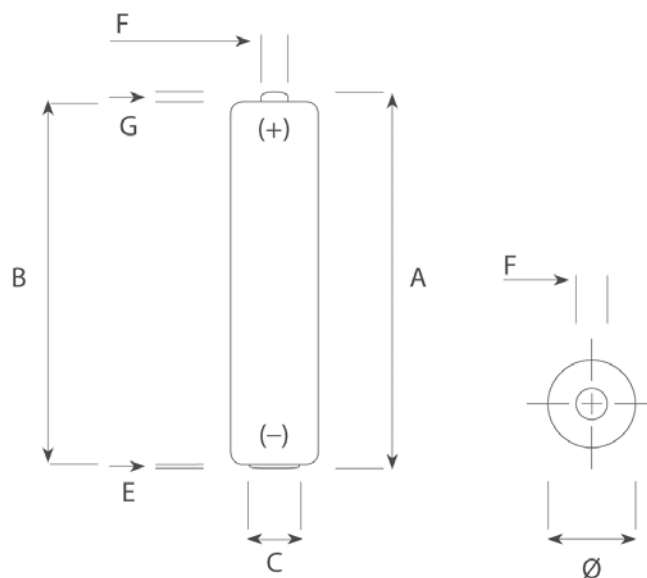

DIMENSIONS






IEC Dimensions (mm)

Dimension	Max	Min
A	44.5	
B		43.3
C		4.3
E	0.5	
F	3.8	
G		0.8
Ø	10.5	9.5

SPECIFICATIONS

Name	LR03 / S / AAA / AM4 / MICRO / MN2400 / 24A / 24AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1.5 Volt
Electrolyte	Potassium Hydroxide
Average weight	11.2 g
Storage temperature range	+10°C ~ + 25°C
Operating temperature range	-20°C ~ + 45°C
Average Impedance	+/- 135 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EC directive 91/157EC & 98/101EC
Recommended cut off voltage	0,8V per cell

LR03AD POWERLINE – TYPICAL DISCHARGE VALUES

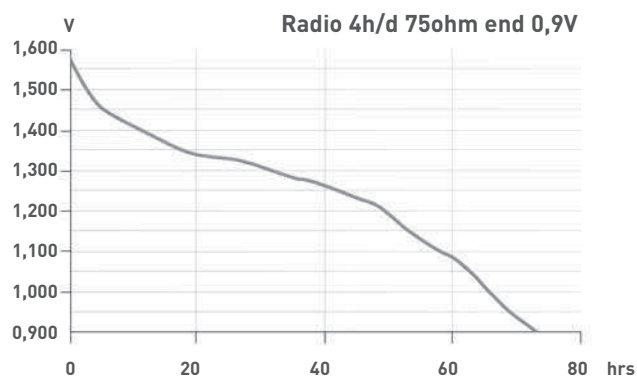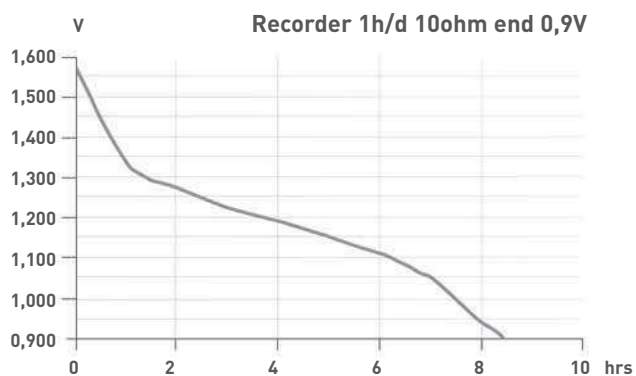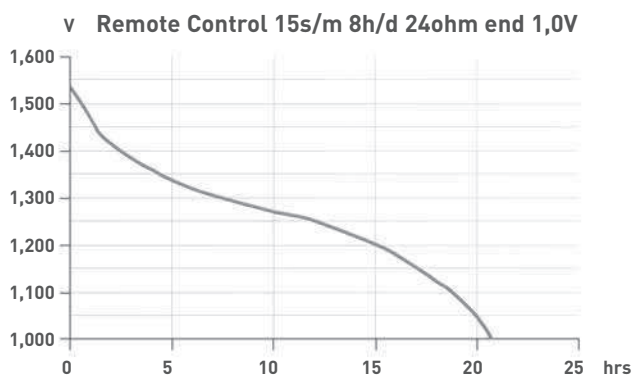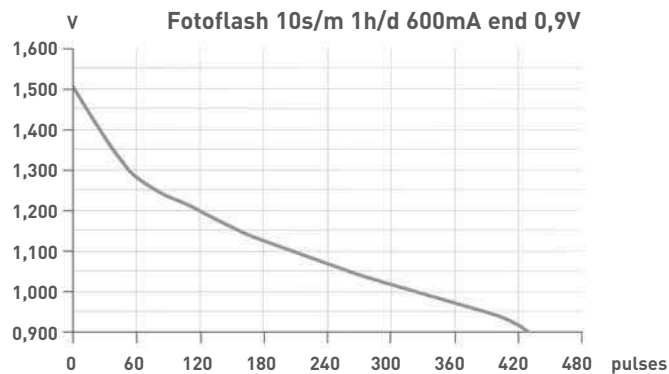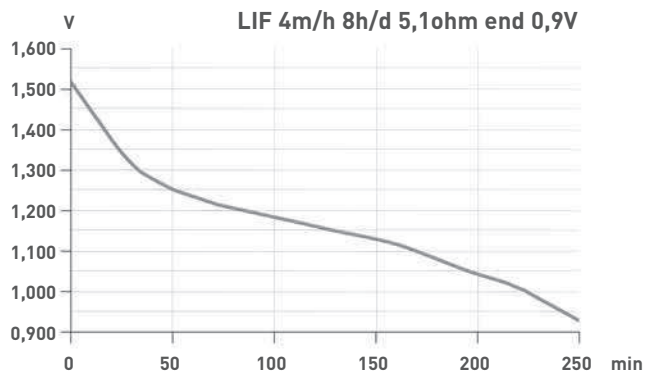

The information herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy of the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change.