



SBL9-12L (12V9Ah)

Item Nr.: SSB108028

Applications (for industrial standby use)

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Emergency light
- Railway signal
- Alarm and security system
- Communication power supply
- DC power supply

Certificates




Specifications

Nominal Voltage	12V	Nominal Oper. Temp. R.	20±2°C
Nominal Capacity	9Ah (C ₂₀ 10.8V)	Operating Temp. Range	Discharge: -15~50°C
Approx. Weight	2.6kg		Charge: -15~45°C
Terminal	T2		Storage: 5~30 °C
Container Material	ABS UL94 HB	Float Charge	2.285V/cell ± 0,5 % @ 20°C
Rated Capacity (20°C)	9.00Ah/0.45A, 20hr, 10.8V		Charging Current: 0.1-0.2C
	8.50Ah/0.85A, 10hr, 10.8V	Self Discharge	Temperature coefficient: -3mV/cell/°C
	8.10Ah/1.62A, 5hr, 10.5V		SSB batteries may be stored for up to 6 months
	7.77Ah/2.59A, 3hr, 10.5V		at 20°C (self-discharge per month ≤3%) and then
	6.80Ah/6.80A, 1hr, 10.5V		a freshening charge is required. For higher tempera-
Max. Discharge Current	500A (1s)	Life Expectancy	10-12 years according to EUROBAT
	240A (5s)		10-12 years as Design Life
Short-Circuit Current	666.7A		
Internal Resistance / Impedance (1kHz)	Approx. 17mΩ		

Dimensions

■ T2 Terminal

Unit: mm | Dimensions: 151 Length X 65 Width X 94 Height (100 Height incl. Terminal)

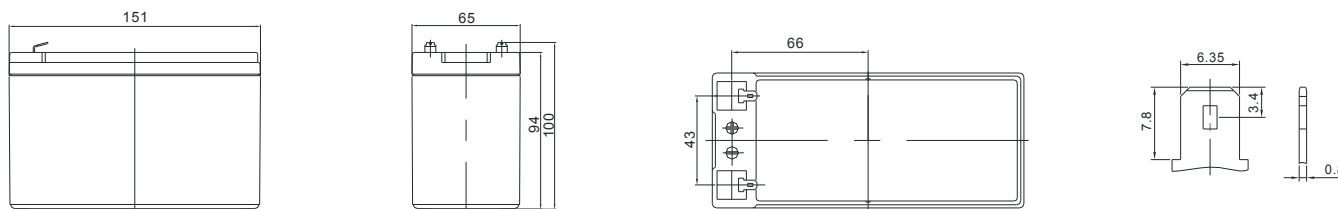


Constant Current Discharge (Amperes) at 20°C

F.V/Time	2min	5min	10min	15min	30min	45min	60min	90min	3h	5h	8h	10h	20h
1.60V/cell	92.37	48.41	28.89	21.14	12.18	8.73	6.86	4.86	2.65	1.67	1.08	0.88	0.46
1.65V/cell	87.21	47.11	28.51	20.97	12.13	8.71	6.85	4.85	2.64	1.67	1.08	0.88	0.46
1.70V/cell	75.17	44.29	27.84	20.74	12.13	8.71	6.84	4.83	2.61	1.64	1.06	0.86	0.45
1.75V/cell	66.40	41.70	26.98	20.33	12.02	8.65	6.80	4.80	2.59	1.62	1.05	0.86	0.45
1.80V/cell	57.82	38.47	25.66	19.58	11.76	8.51	6.71	4.74	2.56	1.60	1.04	0.85	0.45


Constant Power Discharge (Watts/cell) at 20°C

F.V/Time	2min	5min	10min	15min	30min	45min	60min	90min	3h	5h	8h	10h	20h
1.60V/cell	153.31	89.76	53.65	39.51	23.13	17.14	13.27	9.68	5.03	3.31	1.98	1.60	0.89
1.65V/cell	149.14	90.30	52.79	38.56	22.87	17.09	12.98	9.66	5.06	3.30	1.96	1.59	0.88
1.70V/cell	139.11	81.50	52.40	39.33	23.39	17.09	13.30	9.62	5.08	3.28	1.91	1.56	0.88
1.75V/cell	120.16	79.10	51.08	38.68	23.33	17.00	13.12	9.54	5.09	3.25	1.88	1.53	0.87
1.80V/cell	106.99	72.96	48.80	37.57	23.09	16.80	13.07	9.47	5.10	3.23	1.84	1.49	0.85


Self Discharge Characteristics

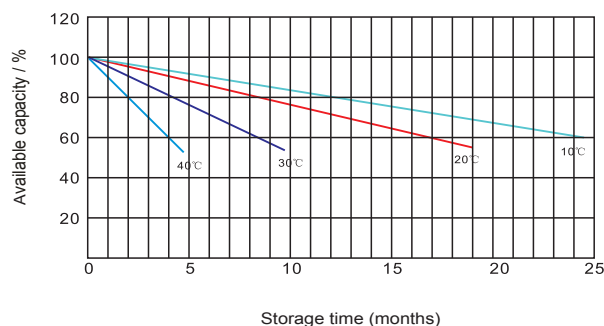

Float Charging Characteristics

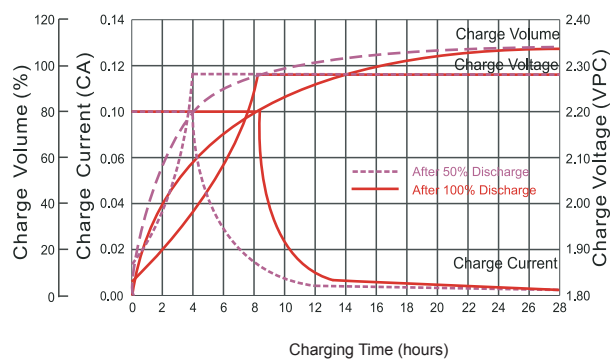

Temperature Effects in Relation to Battery Capacity

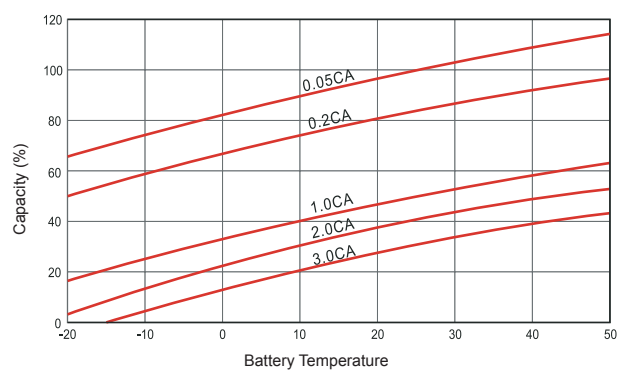

Effect of Temperature on Long Term Float Life

