

MB12-0.8 (12V0.8Ah)

Applications

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Emergency light
- Railway signal
- Alarm and security system
- Communication power supply
- DC power supply

Certificates



Conform to
IEC60896-21&22

Specifications







Nominal Voltage	12V
Nominal Capacity	0.8Ah (C ₂₀ 1.75V/cell)
Approx. Weight	0.33kg
Terminal	/
Container Material	ABS UL94 HB
Rated Capacity (25°C)	0.80Ah/0.040A, 20hr, 1.75V/cell 0.76Ah/0.076A, 10hr, 1.75V/cell 0.67Ah/0.134A, 5hr, 1.75V/cell 0.588Ah/0.196A, 3hr, 1.75V/cell 0.486Ah/0.486A, 1hr, 1.60V/cell
Max. Discharge Current	12A (5s)
Internal Resistance / Impedance (1kHz)	Approx. 180mΩ
Operating Temp. Range	Discharge: -15~50°C Charge: 0~40°C Storage: -15~40°C

Nominal Oper. Temp. R.	25±3°C
Cycle Use	Initial Charging Current less than 0.24A. Voltage 14.7V +1% at 25 °C. Temperature Coefficient -30mV/ °C.
Standby Use	No limit on Initial Charging Current. Voltage 13.65V +1% at 25 °C Temp.
Capacity affected by Temp.	40°C 103% 25°C 100% 0°C 86%
Self Discharge	SB batteries may be stored for up to 6 months at 25°C and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Life Expectancy	3-5 years according to EUROBAT

Dimensions

■ Terminal

Unit: mm [inches]






Constant Current Discharge (Amperes) at 25°C

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1.54	1.07	0.883	0.766	0.614	0.473	0.386	0.236	0.180	0.148	0.125	0.109	0.086	0.072	0.040
1.80V/cell	1.89	1.28	1.02	0.866	0.680	0.515	0.416	0.251	0.189	0.155	0.131	0.113	0.090	0.074	0.040
1.75V/cell	2.24	1.44	1.13	0.943	0.726	0.547	0.438	0.262	0.196	0.160	0.134	0.116	0.092	0.076	0.040
1.70V/cell	2.54	1.59	1.22	1.01	0.763	0.569	0.456	0.272	0.202	0.164	0.138	0.119	0.093	0.077	0.041
1.65V/cell	2.80	1.71	1.29	1.06	0.795	0.591	0.475	0.280	0.207	0.168	0.141	0.121	0.095	0.078	0.042
1.60V/cell	2.94	1.79	1.35	1.10	0.818	0.604	0.486	0.289	0.212	0.172	0.144	0.124	0.097	0.080	0.042


Constant Power Discharge (Watts/cell) at 25°C

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2.90	2.04	1.70	1.48	1.20	0.927	0.761	0.467	0.357	0.295	0.251	0.218	0.174	0.145	0.080
1.80V/cell	3.52	2.41	1.95	1.67	1.32	1.00	0.815	0.494	0.374	0.308	0.260	0.226	0.179	0.149	0.080
1.75V/cell	4.12	2.70	2.13	1.80	1.40	1.06	0.853	0.512	0.384	0.316	0.266	0.230	0.183	0.151	0.081
1.70V/cell	4.62	2.94	2.29	1.92	1.46	1.09	0.884	0.530	0.395	0.322	0.271	0.235	0.184	0.153	0.082
1.65V/cell	5.03	3.13	2.39	1.99	1.51	1.13	0.915	0.543	0.403	0.327	0.275	0.238	0.187	0.154	0.082
1.60V/cell	5.19	3.21	2.46	2.03	1.53	1.14	0.928	0.556	0.410	0.333	0.279	0.241	0.189	0.156	0.082


Discharge Characteristics

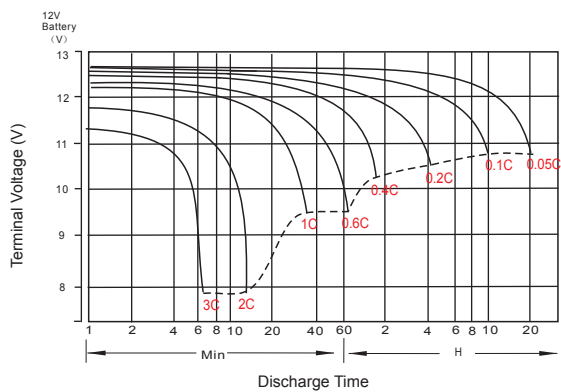

Float Charging Characteristics

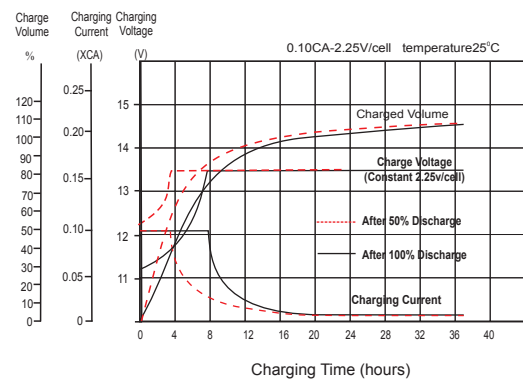

Temperature Effects in Relation to Battery Capacity

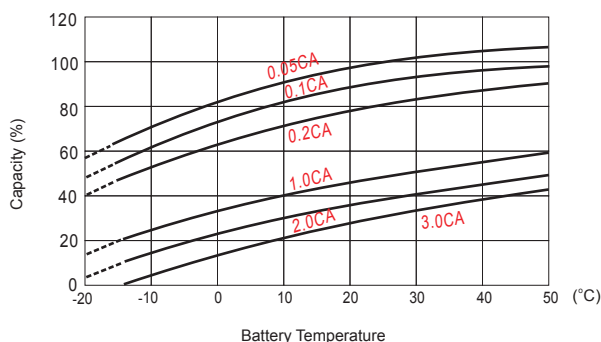

Effect of Temperature on Long Term Float Life

