


Grid Power 1500-2HT M8V0 (2V1500Ah)

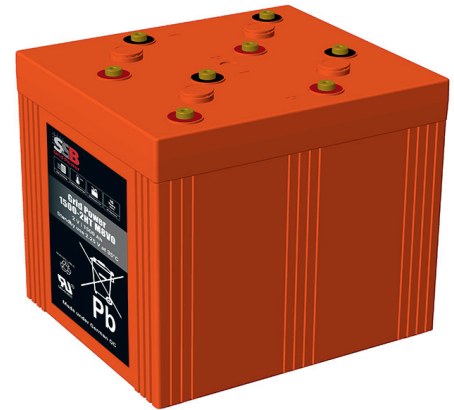

Applications

- Uninterruptible power supply (UPS)
- Telecommunication base station
- High temperature station without air-condition
- Station in the open air

Certificates




Specifications

Nominal Voltage	2V	Operating Temp. Range	Discharge: -40~65°C
Nominal Capacity	1500Ah (C ₁₀ , 1.80V/cell)		Charge: -20~45°C
Approx. Weight	97.8kg		Storage: -20~50°C
Terminal	M8	Standby Use	Initial Charging Current less than 250A.
Container Material	ABS UL94 V0		Voltage 2.25V at 35°C.
Rated Capacity (35°C)	1590.0Ah/79.5A, 20hr, 1.80V/cell		Temperature Coefficient -3mV/°C.
	1500.0Ah/150.0A, 10hr, 1.80V/cell	Capacity affected by Temp.	40°C 103%
	1332.0Ah/266.4A, 5hr, 1.75V/cell		35°C 100%
	1192.5Ah/397.5A, 3hr, 1.75V/cell		0°C 86%
	961.7Ah/961.7A, 1hr, 1.60V/cell	Self Discharge	SSB Grid Power batteries may be stored for up to 6 months at 25°C/3 months at 35°C and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Max. Discharge Current	1200A (5s)	Life Expectancy	Classified as „Very Long Life“ according EUROBAT.
Internal Resistance / Impedance (1kHz)	Approx. 0.3mΩ		
Nominal Oper. Temp. R.	35 (+5/-15)°C		

Dimensions

■ M8 Terminal

Unit: mm | Dimensions: 403 Length X 354 Width X 339 Height (349 Height incl. Terminal)

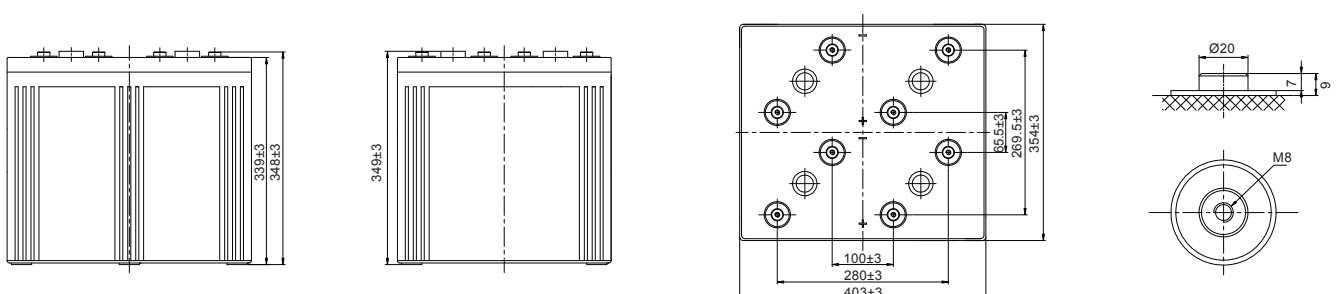


Constant Current Discharge (Amperes) at 35°C

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1750.1	1485.0	1355.4	1219.5	1026.0	840.0	706.5	468.0	360.9	291.4	245.7	214.3	171.0	143.4	75.9
1.80V/cell	2130.0	1737.0	1544.6	1372.5	1131.0	912.0	765.9	499.5	379.0	303.8	255.9	222.0	178.1	150.0	79.5
1.75V/cell	2489.5	1998.0	1747.4	1539.0	1239.0	994.0	836.4	528.0	397.5	318.8	266.4	230.3	183.0	153.0	81.1
1.70V/cell	2849.0	2241.0	1931.4	1674.0	1332.0	1054.0	884.9	554.3	415.0	330.0	274.3	237.5	188.4	156.8	83.1
1.67V/cell	3058.7	2412.0	2082.0	1800.0	1410.0	1100.0	922.5	576.0	428.2	339.4	281.9	243.0	190.9	159.3	84.4
1.60V/cell	3330.0	2583.0	2208.0	1890.0	1473.0	1148.0	961.7	597.8	438.3	346.9	287.7	247.5	194.3	160.8	85.1


Constant Power Discharge (Watts/cell) at 35°C

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	3268.4	2793.7	2566.3	2319.5	1960.8	1615.1	1366.6	910.3	705.4	571.5	484.0	423.4	339.3	285.2	151.2
1.80V/cell	3912.9	3220.4	2886.8	2583.0	2144.0	1741.9	1473.2	966.9	737.1	593.7	501.9	436.9	352.4	297.9	158.0
1.75V/cell	4493.6	3645.4	3219.8	2863.3	2330.9	1887.4	1601.6	1018.0	771.2	620.9	520.7	451.8	361.2	303.5	161.0
1.70V/cell	5057.0	4031.6	3522.5	3087.9	2484.8	1987.4	1685.7	1064.2	802.1	640.2	534.6	465.3	371.6	310.7	164.9
1.67V/cell	5331.3	4274.5	3749.7	3284.6	2610.8	2062.5	1747.3	1101.3	824.0	656.2	547.4	474.6	375.5	315.3	167.3
1.60V/cell	5684.3	4488.0	3910.8	3409.6	2700.0	2132.4	1808.9	1135.7	839.0	667.7	556.6	481.9	381.3	317.7	168.3


Discharge Characteristics

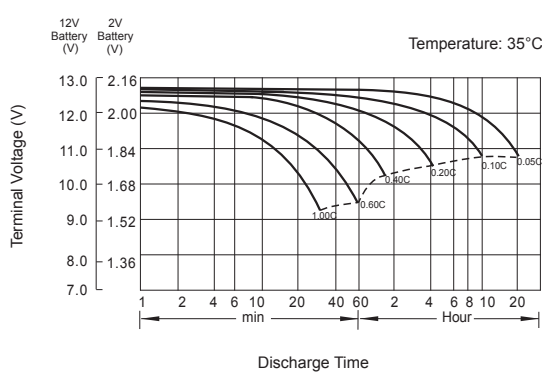


Float Charging Characteristics

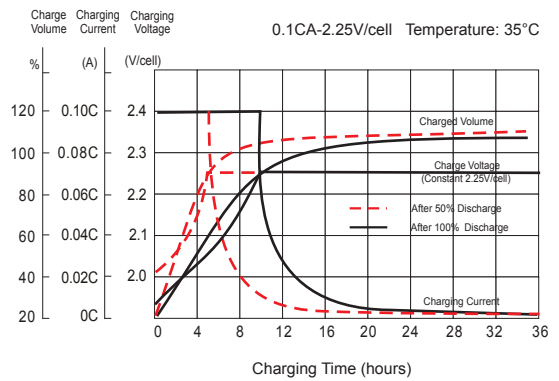

Temperature Effects in Relation to Battery Capacity

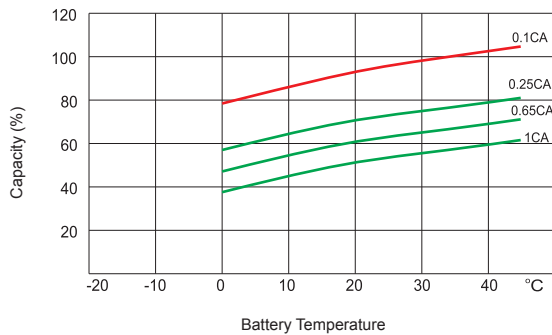

Effect of Temperature on Long Term Float Life

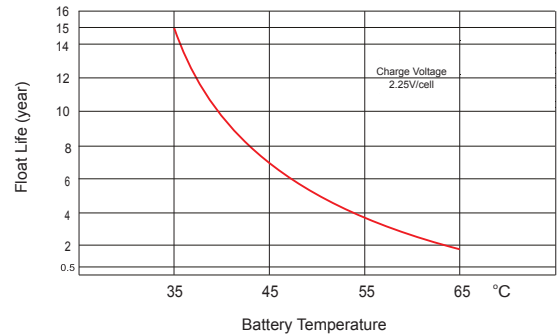

Cycle Service Life in Relation to Depth of Discharge

