



## Lithium Iron Phosphate (LiFePO<sub>4</sub>)

## LiBrick S12-7.5 T2

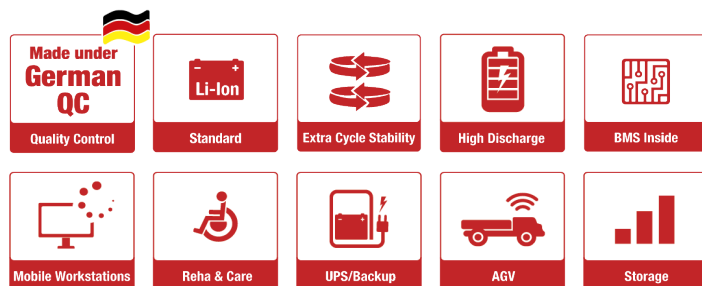

### Main Applications

- + Mobile Workstations
- + Reha & Care
- + UPS/Backup
- + AGV
- + Storage
- + Medical Devices
- + Emergency Lights

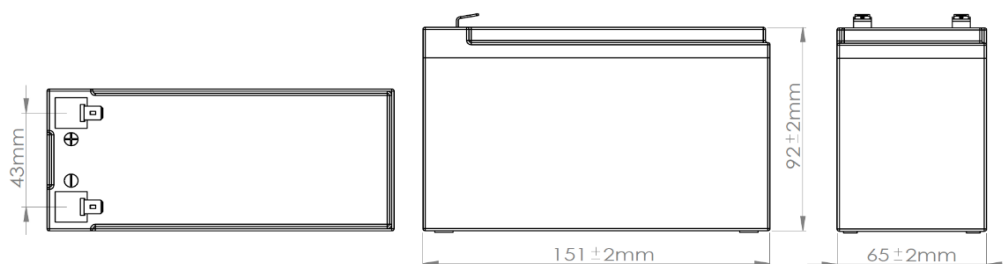

Electrical Parameter		
Cell type	18650	
Technology	Lithium Iron Phosphate (LFP)	
Configuration	4S5P	
Nominal voltage	12,8	V
Rated capacity	7,5	Ah
Rated energy	96	Wh
Internal resistance	30	mΩ
Interconnectable (serial)	*	
Interconnectable (parallel)	4	
Temperature range transport	-20 - 60	°C

Mechanical Parameter		
Length (±2mm)	151	mm
Width (±2mm)	65	mm
Height (±2mm + 2 mm T2)	92	mm
Weight	1100	g
Volumetric energy density	4011,0	Wh/l
Gravimetric energy density	87,3	Wh/kg
Housing	ABS; V0 - UL94	
Protection level	(not certified)	IP56
Special features	designed for highest safety	
Design life** >	10	Years

Charge Parameter		
Charging methode	CC-CV	
Recommended charge current	3,75	A
Maximum charge current	7,5	A
End of charge voltage	14,6	V
Temperature range charge	0 - 45	°C
Temperature range storage	0 - 40	°C
Humidity range	5-85%	%RH
Recuperation	/	A
Cycle life** at 80% DOD	4000	



Discharge Parameter		
Constant discharge current	15	A
Peak discharge current	45	A
Duration of peak discharge	5	s
End of discharge voltage	10	V
Temperature range discharge	-20 - 55	°C
Discharge current @ < -20°C	2,4	A
Discharge current @ -15°C	6	A
Discharge current @ > 0°C	20	A
Capacity drop at low temp.	80% (0°C/0,2C) 50% (-10°C/0,2C)	

BMS Parameter		
Short circuit protection	200-800	$\mu$ S
Over current protection	50 $\pm$ 10	A
Over current protection	$\leq$ 300	mS
Deep discharge protection cell	2 $\pm$ 0,1	V
Deep discharge protection	$\leq$ 300	mS
Over voltage protection cell	3,9 $\pm$ 0,05	V
Over voltage protection	$\leq$ 2000	ms
Over temp. protection >	65 $\pm$ 5	$^{\circ}$ C
Balancing start voltage >	3,6 $\pm$ 0,05	V
Board consumption (sleep)	20	$\mu$ A



Interconnector / Interfaces	
Charge	T2
Discharge	T2
Data	/
Communication	/
Communication protocol	/


T2
----

DISCHARGE CAPACITY at VARIOUS TEMPERATURES  
DISCHARGE @0.5C

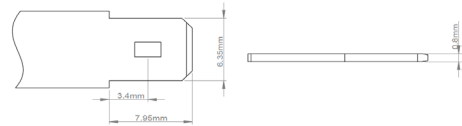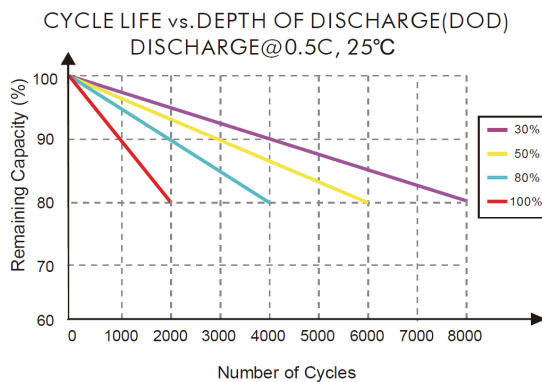

CHARGING CHARACTERISTICS @0.5C, 25 $^{\circ}$ C

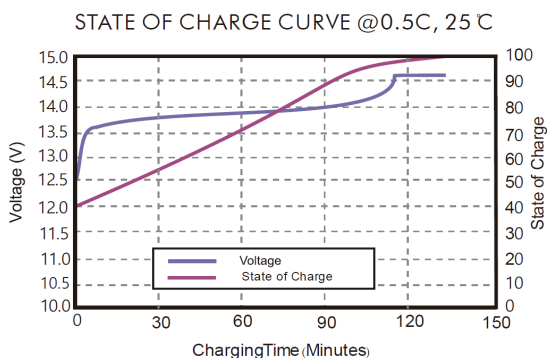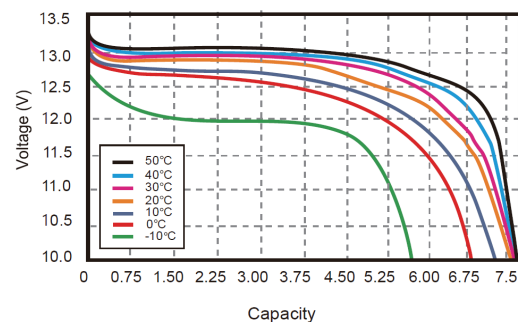

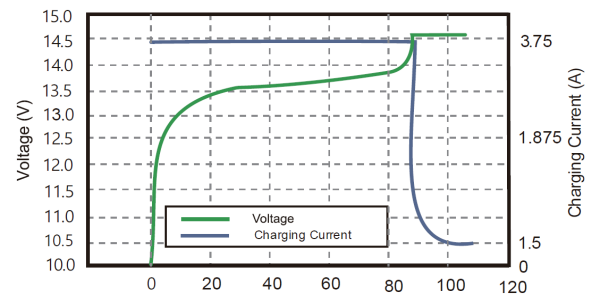Suitable Accessories

Compliance	
UN38.3	Yes
RoHS	Yes
REACH	Yes
CE	Yes
UL1642	Ready (Cell)
IEC 62133-2:2017	Yes
UL2054	Ready

\*Serial connection is not recommended, as differences in capacity or state of charge, for example, can affect the performance and safety of the entire system. If a serial connection is required, ensure that the batteries used are identical (same capacity, voltage, and from the same batch) and synchronized (same state of charge and internal resistance). Use a suitable charging and management system that monitors the entire connection.

\*\*Values are approximations only. Cycle life and design life significantly depend on usage patterns and ambient conditions.

All information and data in this document or otherwise made available are subject to change. The recipient is responsible for checking and verifying the extent to which the information contained is applicable. At the time of publication, all information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied. The information is intended for use only by partners who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this information or otherwise provided by Battery-Kutter with reference to the use of products provided is given without regard, and Battery-Kutter assumes no obligation or liability for the advice given or results obtained. Specifications subject to change without notice. This data sheet becomes invalid upon the release of a new version.