



# PLX-Pure Lead High Rate PLX12-500 (12V500W)




## Specifications

Rated Voltage	12V	
Nominal Rate ( $W_{15}, 1.67V/cell$ )	500W	
Nominal Capacity( $C_{20}, 1.80V/cell$ )	125Ah	
Dimension	Length	340.9±2mm (13.42 inches)
	Width	170±2mm (6.69 inches)
	Container Height	273.2±2mm (10.76 inches)
	Total Height	275.7±2mm (10.85 inches)
Approx. Weight	41.5 Kg (91.5 lbs)	
Terminal	M6	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (25°C)	130.0 Ah	(20hr, 6.50A, 1.80V/cell)
	125.0 Ah	(10hr, 12.5A, 1.80V/cell)
	124.0 Ah	(5hr, 24.8A, 1.75V/cell)
	113.4Ah	(3hr, 37.8A, 1.75V/cell)
	96.7Ah	(1hr, 96.7A, 1.67V/cell)
Max. Discharge Current	1500A	
Internal Resistance (25°C)	Approx. 3.40mΩ(Fully charged)	
Operating Temp.Range	Discharge	-40 ~ 65°C (-40 ~ 149°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-20 ~ 40°C (-4 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	37.5A	
Charge voltage(25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	<p>PLX series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter.</p> <p>Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.</p>	



## Layout

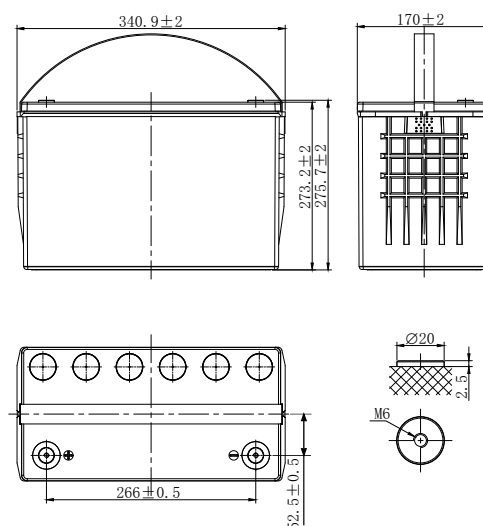

## Constant Current Discharge (Amperes) at 25 °C (77° F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	313.8	249.6	196.5	174.9	140.9	104.5	85.2	47.6	35.3	27.3	23.2	15.9	12.3	6.38
1.80V/cell	361.3	287.7	218.9	191.1	150.5	109.8	88.6	49.8	36.9	28.4	24.3	16.4	12.5	6.50
1.75V/cell	395.0	315.0	237.2	203.9	160.2	112.9	91.1	51.2	37.8	29.2	24.8	16.6	12.7	6.58
1.70V/cell	425.6	340.6	252.4	214.5	166.3	117.0	94.6	51.9	38.6	29.7	25.2	16.8	12.8	6.63
1.67V/cell	475.0	358.8	266.1	222.8	173.1	121.6	96.7	52.9	39.0	30.1	25.4	17.0	12.9	6.68
1.60V/cell	513.4	364.8	275.1	229.0	176.4	123.4	98.3	53.7	39.5	30.4	25.7	17.2	13.0	6.73

## Constant Power Discharge (Watts/cell) at 25 °C (77° F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	602.5	488.1	386.4	345.8	280.0	208.6	170.5	95.6	71.4	55.4	47.3	32.5	25.2	13.2
1.80V/cell	684.2	557.1	426.4	374.3	296.7	217.6	176.3	99.4	74.0	57.3	49.2	33.4	25.6	13.4
1.75V/cell	738.9	604.2	457.9	395.7	312.8	221.8	179.9	101.5	75.5	58.5	50.0	33.7	25.8	13.5
1.70V/cell	783.4	646.0	481.4	411.8	321.5	227.5	185.4	102.3	76.4	59.1	50.4	33.9	26.0	13.5
1.67V/cell	847.0	675.4	500.0	425.2	332.7	235.0	188.4	103.6	76.8	59.6	50.6	34.1	26.1	13.6
1.60V/cell	865.0	680.3	516.3	432.9	335.8	236.6	189.8	104.2	77.1	59.7	50.6	34.1	26.1	13.6



# PLX-Pure Lead High Rate PLX12-500 (12V500W)



## Applications

- UPS
- Emergency lighting
- Emergency power supply
- Electrical starting
- Power tools


## General Features

- 15 years design life(25°C)
- Premium ABS+PC jar & covers, Flame Retardant to UL94 V-0
- High-rate performance, high energy density
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


## Standards

- Classified as "Very Long Life" according to Eurobat
- CE Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


## Discharge Characteristics

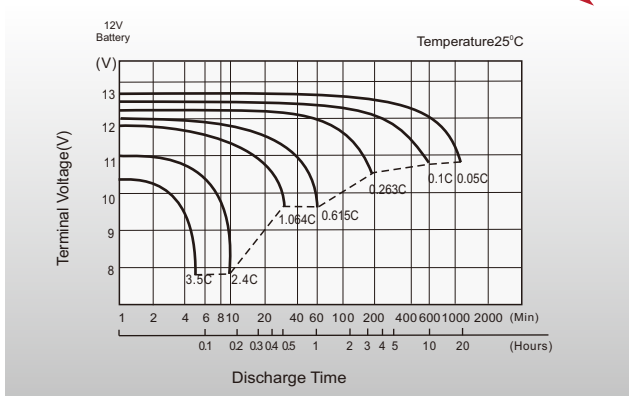

## Float Charging Characteristics

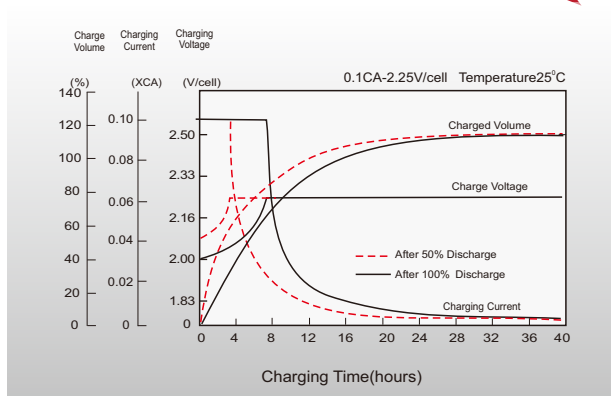

## Effects of Temperature on Discharging Time

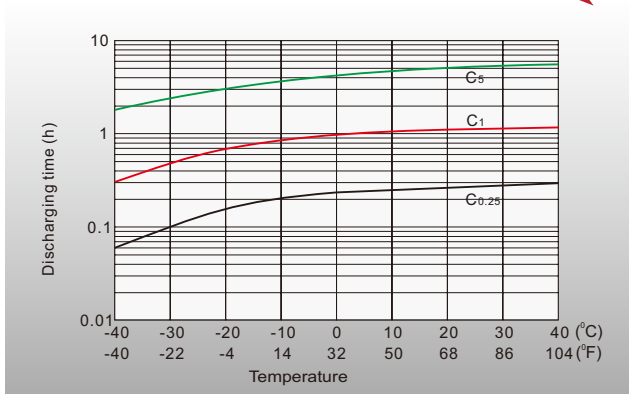

## Self-discharge Characteristics

