

Powered by

WAMTECHNIK

Rechargeable Li-ion battery pack – 1695.01.001.4

Configuration: 3S2P




Dimensions:

Length: 56 ±1mm

Width: 41,5 ±1mm

Height: 67 ±1mm

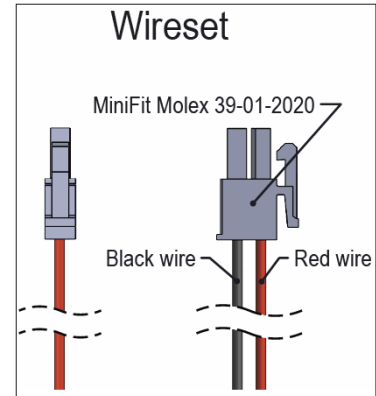

Data for pack

Nominal Voltage		10.95V	
Rated Capacity		5.34Ah	
Nominal Capacity		5.5Ah	
Used cell in Pack		6pcs	INR18650-29E
Internal resistance pack		137mΩ	±10%
Max charge voltage		12.6V	25°C
Charge current	standard	2.7A	25°C
	rapid	3.3A	25°C
Discharge	standard	1.1A	25°C
	max. cont.	3.3A	25°C
	max. Peak	5A	25°C t<70ms
Short Circuit current		80A	t<1ms
Cable length		150mm	± 5mm
Connector		Molex	MiniFit 39-01-2020
Weight		295g	±10g
Watt-hour rating		58Wh	
Charge temperature	standard	0°C - 45°C	
	rapid	10°C - 40°C	
Discharge temperature		standard	-20°C - 60°C
Storage temperature		1 year	0~23°C
Note 1: Self discharge <1% / month			
Note 2: Delivery SOC aprox. 30%			

Limitations by Safety Unit (SU)

Over Voltage (per cell)	cut off	4.35V	±0.025
	release	4.15V	±0.05
Under Voltage (per cell)	cut off	2.4V	±0.08
	release	3.0V	±0.10
Current Limit 1 by SU		5A	t~70ms
Current Limit 2 by SU		7A	t~50ms
Power Consumption	active		