



PLX-Pure Lead High Rate PLX12-420 (12V420W)




Specifications

Rated Voltage	12V	
Nominal Rate ($W_{15}, 1.67V/cell$)	420W	
Nominal Capacity($C_{20}, 1.80V/cell$)	100Ah	
Dimension	Length	340.9±2mm (13.42 inches)
	Width	170±2mm (6.69 inches)
	Container Height	213.2±2mm (8.39 inches)
	Total Height	215.7±2mm (8.49 inches)
Approx. Weight	33.0 Kg (72.8 lbs)	
Terminal	M6	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (25°C)	100.4 Ah	(20hr, 5.20A, 1.80V/cell)
	100.0 Ah	(10hr, 10.0A, 1.80V/cell)
	94.0 Ah	(5hr, 18.8A, 1.75V/cell)
	87.0Ah	(3hr, 29.0A, 1.75V/cell)
	76.2Ah	(1hr, 76.2A, 1.67V/cell)
Max. Discharge Current	1200A	
Internal Resistance (25°C)	Approx. 3.50mΩ(Fully charged)	
Operating Temp.Range	Discharge	-40 ~ 65°C (-40 ~ 149°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-20 ~ 40°C (-4 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	30.0A	
Charge voltage(25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	<p>PLX series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter.</p> <p>Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.</p>	



Layout

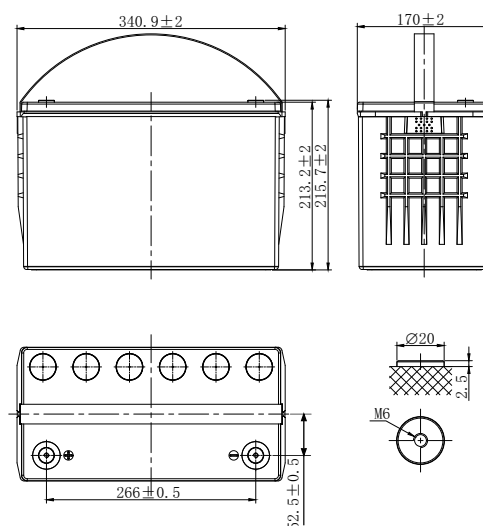

Constant Current Discharge (Amperes) at 25 °C (77° F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	288.7	214.5	169.8	153.0	111.6	84.4	67.1	37.8	27.1	21.7	17.6	11.9	9.80	5.10
1.80V/cell	332.4	247.3	189.2	167.2	119.3	88.7	69.8	39.6	28.3	22.6	18.4	12.3	10.0	5.20
1.75V/cell	363.4	270.7	205.0	178.4	126.9	91.2	71.8	40.7	29.0	23.2	18.8	12.5	10.1	5.26
1.70V/cell	391.5	292.7	218.1	187.7	131.8	94.5	74.6	41.3	29.6	23.6	19.1	12.6	10.3	5.31
1.67V/cell	437.0	308.3	230.1	194.9	137.1	98.2	76.2	42.1	29.9	23.9	19.3	12.8	10.3	5.35
1.60V/cell	472.3	313.5	237.8	200.4	139.8	99.7	77.5	42.7	30.3	24.2	19.5	12.9	10.4	5.39

Constant Power Discharge (Watts/cell) at 25 °C (77° F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	554.3	419.4	334.0	302.6	221.8	168.5	134.3	76.1	54.7	44.1	35.8	24.4	20.1	10.6
1.80V/cell	629.4	478.8	368.6	327.5	235.1	175.7	138.9	79.1	56.7	45.6	37.3	25.1	20.5	10.7
1.75V/cell	679.8	519.2	395.8	346.3	247.9	179.1	141.7	80.8	57.8	46.6	37.9	25.4	20.6	10.8
1.70V/cell	720.7	550.0	418.0	360.4	254.7	183.8	146.0	81.4	58.6	47.0	38.2	25.5	20.8	10.8
1.67V/cell	793.3	570.0	420.0	372.1	263.6	189.8	148.4	82.4	58.9	47.4	38.3	25.7	20.8	10.8
1.60V/cell	810.0	575.0	443.0	378.8	266.0	191.1	149.6	82.9	59.1	47.5	38.3	25.7	20.9	10.9



PLX-Pure Lead High Rate PLX12-420 (12V420W)



Applications

- UPS
- Emergency lighting
- Emergency power supply
- Electrical starting
- Power tools


General Features

- 15 years design life(25°C)
- Premium ABS+PC jar & covers, Flame Retardant to UL94 V-0
- High-rate performance, high energy density
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


Standards

- Classified as "Very Long Life" according to Eurobat
- CE Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

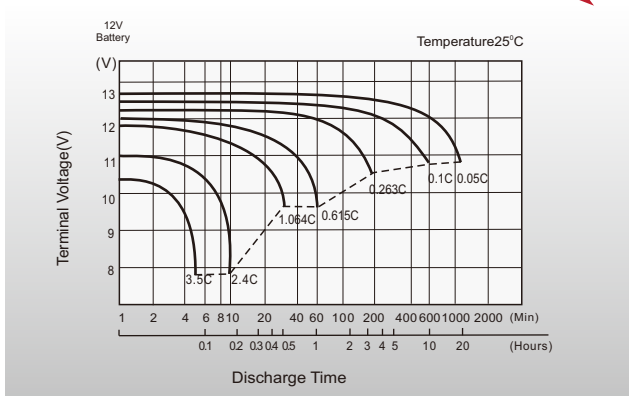

Float Charging Characteristics

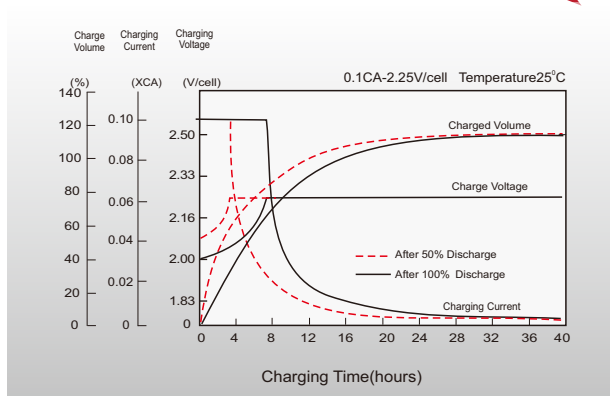

Effects of Temperature on Discharging Time

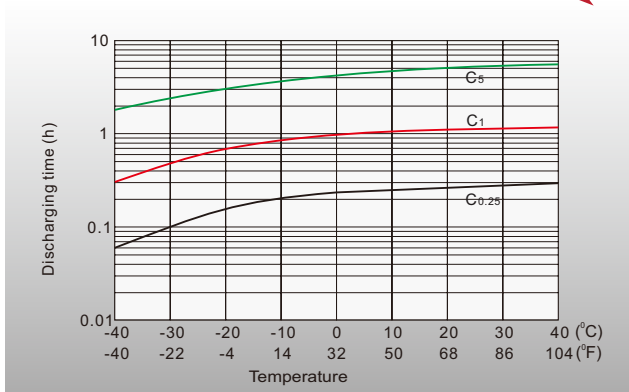

Self-discharge Characteristics

